




POWER KA BOSS



Ape Xtra HT
CNG




3 years/1 lakh km



**300 CC
CNG
POWER
ENGINE**



Earnings of CNG, power of Diesel

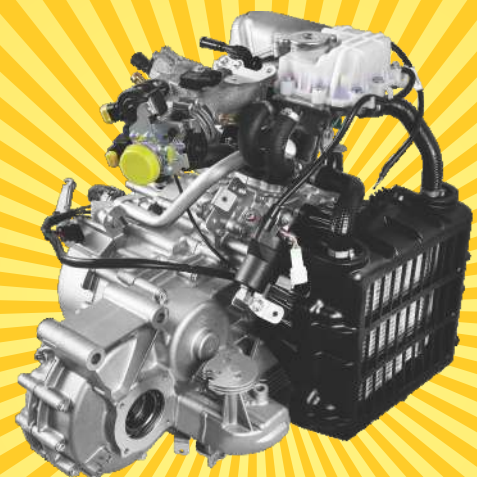

EXPERIENCE PIAGGIO'S **POWER** OF TECHNOLOGY

Piaggio's own, new 300 cc water-cooled engine

Fuel injection technology: Ensure optimum fuel consumption & higher mileage.

Powerful **300 cc CNG** Engine

LEAD WITH THE POWER-PACKED PERFORMANCE

Unmatched power (11.27hp)
Take any load with the excellent load carrying capacity.

Superior driving
experience with the advanced engine.

Best-in-class pickup
Be it any load on any terrain, move effortlessly with the top-class pickup.

Drive easily
with 5 forward and 1 reverse gear.

DRIVE NON-STOP, EARN NON-STOP



Best in Class
Mileage



2.8 ltr. petrol tank
Don't let your earnings stop even when you run out of CNG.

Take any load without any worry

LET EVERY RIDE BE EXTRA COMFORTABLE



Best-in-class
Gradeability of 26.4%



Best-in-class ground clearance of 235 mm:
Drive comfortably even on poor and bumpy roads.



Lesser noise and vibrations
make every ride smooth.

LOWER MAINTENANCE. HIGHER PEACE OF MIND.



Longer engine life

The water-cooled technology assures extra life for filters and increased oil change intervals.



Long-life aluminium clutch
(30,000 kms)



Let us take care of it

Best-in-class warranty of 3 years or 1,00,000 km



Technical Specifications

| Attributes | Apé Xtra LDX+ HT CNG |
|------------------------------|---|
| Fuel Type | CNG |
| Engine Type | 4-stroke, Water cooled, 2 valves BSVI Engine |
| Displacement | 305 cc |
| Max Power | 8.41 kW @ 4100± 100 rpm |
| Max Torque | 23.26 Nm @ 2900± 100 rpm |
| Transmission | |
| Clutch Type | Multi plate wet type |
| Gear box | Constant mesh |
| No. of gears | 5 Forward, 1 Reverse |
| Suspension | |
| Front | Hydraulic Telescopic Shock Absorber With Helical Compression Spring with dampener |
| Rear | Hydraulic Telescopic Shock Absorber With Rubber Compression Spring with dampener |
| Steering | |
| Steering Type | Handle Bar Type |
| Brake and Tyre | |
| Brake | Drum Brake Hydraulically Actuated Internal Expanding Shoe Type |
| Tyre | 4.50 - 10, 8 PR |
| Electrical System | |
| System Voltage | 12V DC |
| Battery Rating | 35 Ah |
| Dimensions | |
| Wheel base | 2100 mm |
| Overall width | 1490 mm |
| Overall length | 3315 mm |
| Overall height | 1770 mm |
| Min. ground clearance | 235 mm |
| Cargo Box Dimensions (LxWxH) | 1810 x 1400 x 285 mm |
| Weights | |
| GVW | 975 kg |
| Kerb weight | 500 kg |
| Performance | |
| Maximum Grade ability | 26.40% |
| Fuel Tank Capacity | CNG : 40 Ltr., Petrol : 2.8 Ltr. |
| Max Speed | 60 Km/h |



Spacious Cabin



Advance Information display



Strong suspension



Attractive design and looks



Tubeless Tyres
First in 3 Wheeler Segment

PIAGGIO VEHICLES PRIVATE LIMITED

1st Floor, Sky One Corporate Park, Survey No. 239/02, Airport Road, Viman Nagar, Pune-411032, Maharashtra | www.piaggio-cv.co.in

Please note that the images and technical specifications shown in the chart may showcase accessories and equipment which are not part of the standard fitment. Piaggio reserves the rights to alter the technical specifications and features without prior notice. | Specifications are subject to improvements / changes.

Dealer: